


# Irgazin® DPP Rubine TR

transparent DPP red with outstanding color strength, excellent durability and very high saturation; recommended for automotive and high-grade industrial paints

**chemical type** diketo-pyrrolo-pyrrole

**Colour Index** Pigment Red 264 | 561300

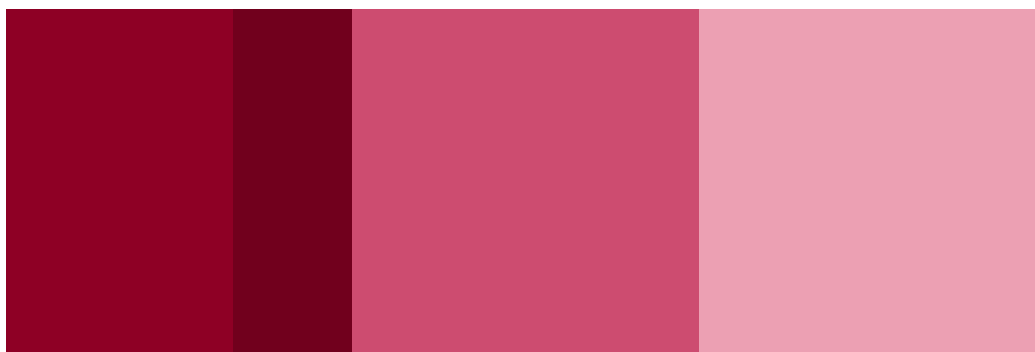

full shade alkyd/melamine system	1/3 standard depth of shade alkyd/melamine system	1/25 standard depth of shade alkyd/melamine system
-------------------------------------	--	---

**resistance to weathering**

**acrylic/melamine system**

1/25 standard depth of shade	3–4
1/3 standard depth of shade	3–4
full shade	5

**alkyd/melamine system**

1/25 standard depth of shade	4
1/3 standard depth of shade	4–5
full shade	5

**two-coat metallic system**

50:50 aluminum	5
50:50 aluminum	–5
80:20 aluminum	5
80:20 aluminum	–5

**fastness to light**

**alkyd/melamine system**

1/25 standard depth of shade	8
1/3 standard depth of shade	8
50:50 aluminum	8
80:20 aluminum	8
full shade	8

**suitability for industries**

<b>automotive</b>	<b>general industrial</b>	<b>coil</b>	<b>powder</b>	<b>wood</b>	<b>decorative</b>
●	●	●	●	⊙	⊙

**suitability for applications**

<b>baking finishes</b>	<b>water-based</b>	<b>acrylic/isocyanate</b>	<b>acid-curable</b>	<b>amine-curable</b>	<b>air-drying</b>
●	●	●	●	●	●

**explanation of symbols** ● suitable    ⊙ potentially suitable    ○ not suitable

**physical data**

pH	9.2	density [g/cm <sup>3</sup> ]	1.39
conductivity [μS/cm]		bulk volume [l/kg]	0.8

conductivity [ $\mu\text{S}/\text{cm}$ ]		bulk volume [l/kg]	3.8
specific surface [ $\text{m}^2/\text{g}$ ]	100	dry content [%]	
oil absorption [g/100 g]	62	pigmentation level [%]	
viscosity (6-mm DIN cup) [s]			
<b>thermal resistance</b>			
150 °C (302 °F), 30 min.		5	
200 °C (392 °F), 10 min.		5	
<b>fastness to overcoating</b>			
cellulose nitrate paint		5	
baking finish, 130 °C (266 °F), 30 min.		5	
<b>resistance to solvents</b>			
butyl acetate		water	5
ethanol	4–5	white spirit	
methylethyl ketone	4–5	xylene	5
methoxy-1,2-propanol			

Please contact your BASF sales representative for more information on the test methods applied.

The proximity of the demonstrated shades to the original hues depends on the settings and calibration of the equipment used (monitor, printer).

#### Safety

When handling this product, please comply with the advice and information given in the safety data sheet and observe protective and workplace hygiene measures adequate for handling chemicals.

It cannot be ruled out that this product contains particles < 0.1  $\mu\text{m}$ .

If document contains an electron microscopy photograph: Pigment particles form the particle size distribution shown in the electron microscopy photograph above only after intensive dispersion by high shear stresses. In the supplied bulk material, the high adhesive forces between the tiny primary pigment particles cause them to form much larger agglomerates and aggregates which determine the flow and dust properties.

#### Note

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights, etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our product to ensure that any proprietary rights and existing laws and legislation are observed.

® = registered trademark, ™ = trademark of the BASF Group, unless otherwise noted